


2005 - 2009 Toyota Tacoma Overhead Display Removal Instructions :


1. Open sunglass compartment. Remove screw holding compartment to headliner



3. With your fingers or by inserting a thin object, pull down on the front of the console. It will require some pressure to release the clips holding the console in place so be patient. There should be 2 metal clips attached to the console, if they are not there, they are probably inside the hole in which the clips reside. Be sure to save and reattach them properly before installation.

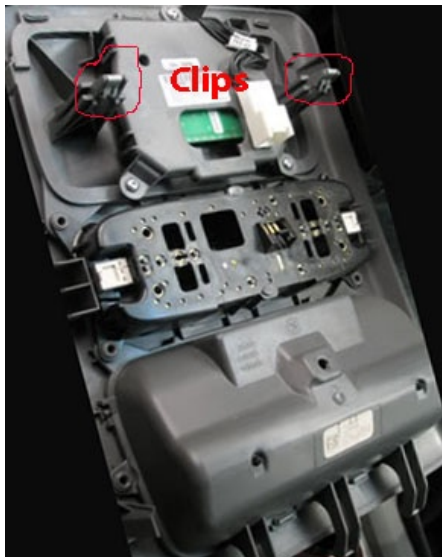

4. Unplug the 2 electrical harnesses connected to the display.

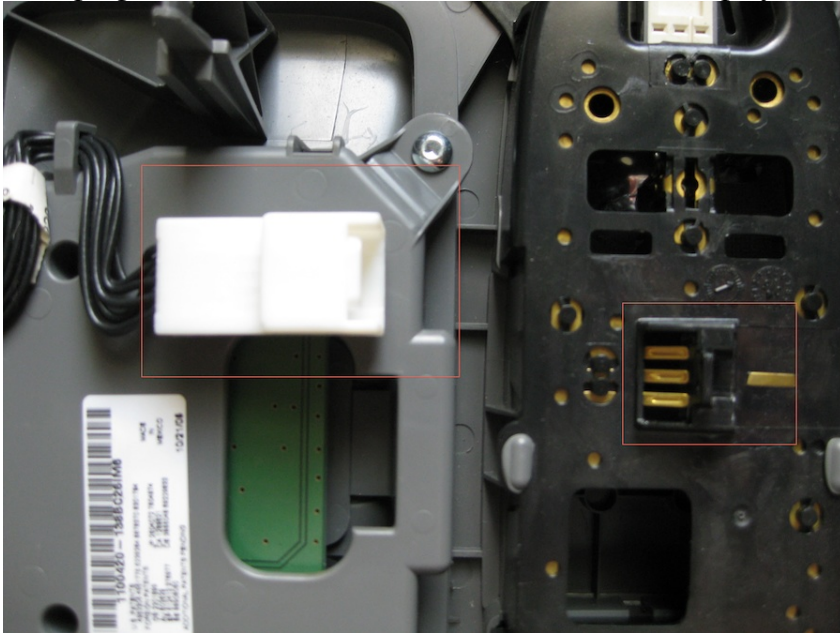

5. Remove the three T10 torx head screws. (If you do not have access to a torx T10 screwdriver you can send the entire assembly in for repair).



5. Remove the display unit from the console and send off for repair.

